

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> :  
**G02B 6/12****A1**(11) International Publication Number: **WO 00/10040**

(43) International Publication Date: 24 February 2000 (24.02.00)

(21) International Application Number: **PCT/US99/18181**

(22) International Filing Date: 11 August 1999 (11.08.99)


(30) Priority Data:  
09/132,580 11 August 1998 (11.08.98) US

(71) Applicant: MASSACHUSETTS INSTITUTE OF TECHNOLOGY [US/US]; 77 Massachusetts Avenue, Cambridge, MA 02139 (US).

(72) Inventors: JOHNSON, Steven, G.; 521 Longmeadow Drive, St. Charles, IL 60174 (US). FAN, Shanhui; 50 Porter Street, Somerville, MA 02143 (US). VILLENEUVE, Pierre, R.; Apartment 107, 61 Brookline Avenue, Boston, MA 02215 (US). KOLODZIEJSKI, Leslie; 56 Carleton Road, Belmont, MA 02178 (US). JOANNOPOULOS, John, D.; 64 Douglas Road, Belmont, MA 02178 (US).

(74) Agents: CONNORS, Matthew, E. et al.; Samuels, Gauthier &amp; Stevens LLP, Suite 3300, 225 Franklin Street, Boston, MA 02110 (US).

(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

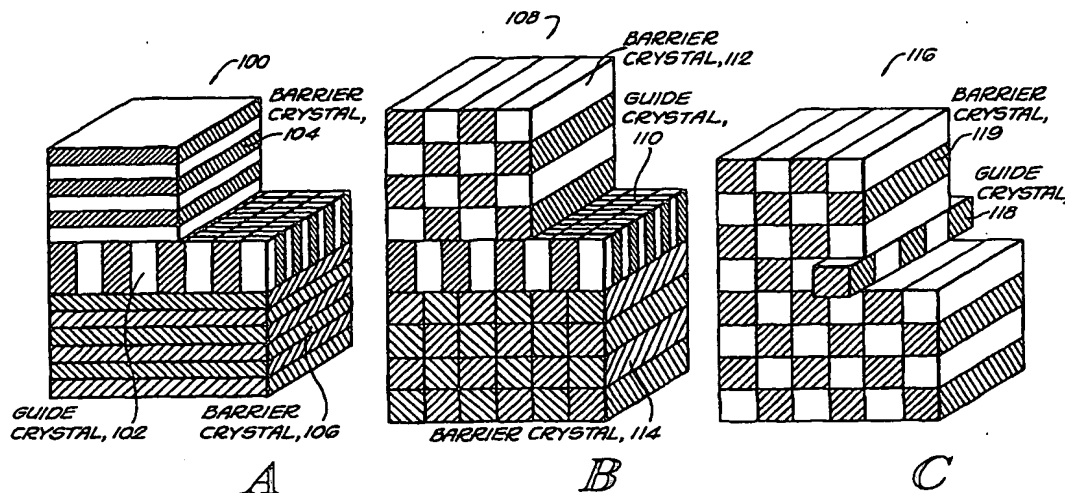**Published***With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*(54) Title: **COMPOSITE PHOTONIC CRYSTALS**

## (57) Abstract

A composite photonic (band gap) crystal structure comprising a guide crystal (for trapping or guiding light) configured in a plane having a dielectric periodicity in at least a first direction in the plane; and barrier crystals configured above and below the guide crystal to confine light within the guide crystal, the barrier crystals having a dielectric periodicity in at least a second direction not in the plane. In another embodiment, there is provided a composite photonic crystal structure comprising a guide crystal configured in a plane having a dielectric periodicity in at least one dimension; and a barrier crystal configured adjacent the guide crystal to confine light within the guide crystal, the barrier crystal having a dielectric periodicity in at least two dimensions.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## COMPOSITE PHOTONIC CRYSTALS

### SPONSORSHIP INFORMATION

This invention was made with government support under Grant No. 9400334-  
5 DMR awarded by National Science Foundation. The government has certain rights in the  
invention.

### BACKGROUND OF THE INVENTION

The invention relates to photonic crystals, and in particular to composite photonic  
crystals comprising one- and two-dimensionally periodic photonic crystals.

10 The development of photonic crystals, structures with band gaps that prevent the  
propagation of light in a certain frequency range, has led to proposals of many novel  
devices for important applications in lasers, opto-electronics, and communications.  
Among these devices are high-Q optical filters, waveguides permitting tight bends with  
low losses, channel-drop filters, efficient LEDs, and enhanced lasing cavities. All of  
15 these devices, however, require the fabrication of photonic crystals allowing confinement  
of light in three dimensions. Moreover, the length scale of the features in a structure must  
be on the order of microns in order to control light of wavelengths typical in opto-  
electronics and other applications.

It is therefore desirable to obtain quasi-3D photonic crystals that approximate the  
20 most desirable properties of true three-dimensionally periodic crystals, but are potentially  
much easier to fabricate since they are composed of lower-dimensionally periodic  
components. The most straightforward way of achieving a photonic crystal in three  
dimensions is to utilize a structure with a true three-dimensional band gap. Here, light  
whose frequency is in the band gap cannot propagate in any direction through the crystal.

25 Such a structure has been described in U.S. Pat. Nos. 5,440,421 and 5,600,483, of  
common assignee, and much effort has been expended in attempting to construct it.  
Fabrication of this and other true 3D structures has proved difficult, however, due to the  
complicated three-dimensional connectivity of these crystals and their extreme sensitivity  
to inter-layer alignment.

30 An alternative approach that has been successfully applied is to take a one- or two-  
dimensionally periodic photonic crystal and to truncate it in the second and/or third  
dimensions using index confinement, classically known as total internal reflection (TIR),

and described in U.S Pat. No. 5,526,449. The foregoing patent refers to structures with one- or two-dimensional periodicities and band gaps as 1D or 2D photonic crystals, respectively, although they may exist in three dimensions. TIR allows light to be guided within a high index (high dielectric constant,  $\epsilon$ ) material surrounded by a low index material. When this effect is combined with a photonic crystal, the resulting hybrid can approximately localize light in a point-like region, a resonant cavity, where the structure has been altered. This alteration, and the resulting resonant cavity, is referred to as a point defect.

Light can even be perfectly guided along a waveguide or line defect, a one-dimensionally periodic line-like region of defects in the periodic structure. A one-dimensionally periodic TIR-based photonic crystal has, in fact, been fabricated successfully as reported by Foresi et al., "Measurement of Photonic Band Gap Waveguide Microcavities," Nature 390, p. 143-145 (1997). Since it does not have a true three-dimensional band-gap, however, light cannot be perfectly confined. Instead, it leaks out slowly. The lifetime according to which localized light leaks out is described by the quality factor, or Q, of the defect. For most applications (including all of those mentioned above), it is critical that the Q of a point defect be as large as possible. Although TIR designs provide adequate values of Q, one would like to do better.

20

### SUMMARY OF THE INVENTION

The invention provides a design of a quasi three-dimensionally periodic photonic crystal. Such a structure is a composite of one- and two-dimensionally periodic photonic crystals, consisting of a photonic crystal guide region surrounded by photonic crystal barrier regions. This design allows confinement of light to a resonant cavity using a point defect, as well as enabling the formation of waveguides using line defects. Quasi-3d crystals have the advantage of being considerably more amenable to fabrication than structures with true three-dimensional periodicity.

According to the present invention, there is provided a composite photonic crystal structure comprising a guide crystal configured in a plane having a dielectric periodicity in at least a first direction in the plane; and barrier crystals configured above and below the guide crystal to confine light within the guide crystal, the barrier crystals having a dielectric periodicity in at least a second direction not in the plane.

In another embodiment, there is provided a composite photonic crystal structure comprising a guide crystal configured in a plane having a dielectric periodicity in at least one dimension; and a barrier crystal configured adjacent the guide crystal to confine light within the guide crystal, the barrier crystal having a dielectric periodicity in at least two dimensions.

These and other objects, features and advantages of the present invention will become apparent in light of the following detailed description of preferred embodiments thereof, as illustrated in the accompanying drawings.

10

### **BRIEF DESCRIPTION OF THE DRAWINGS**

FIGs. 1A-1C are block diagrams of composite photonic crystals in accordance with the invention;

FIG. 2 is block diagram of a hybrid quasi-3D/TIR photonic crystal structure;

15 FIG. 3 is a block diagram of a guide crystal of the invention including an (infinite) two-dimensional slab consisting of a square lattice of dielectric rods in air;

FIG. 4 is a plot of the band structure for the 2D square lattice of rods of FIG. 3;

FIG. 5 is a plot of a band structure for a possible Bragg mirror, folded according to the periodicity of the guide crystal and projected onto the guide's 2D Brillouin zone;

20 FIGs. 6A and 6B are plots of projected band structures for square lattice of truncated rods in air for heights of  $0.6a$  and  $1.6a$ , relative to the horizontal lattice constant  $a$ ;

FIG. 7 is a graph of an abstract band structure for a defect state in the guide crystal, indicating the states in the light cone that it can couple to;

25 FIG. 8 is a plot of the band structure of a square lattice of rods sandwiched between two Bragg mirrors, effectively a composite quasi-3D photonic crystal;

FIG. 9 is a block diagram of a composite photonic crystal 900 in accordance with the invention;

30 FIGs. 10A and 10B are cross sections of a point defect state in a quasi-3D photonic crystal including a defect rod in accordance with the invention with the component of the electric field parallel to the rods;

FIG. 11 is a top view of a point defect state in a true two-dimensional system (square lattice of rods);

FIG. 12 is a plot of the band structure of a quasi-3D composite photonic crystal projected onto the  $\Gamma$ -X direction;

5        FIGs. 13A and 13 B are side view and top view cross sections, respectively, of a line defect state in a quasi-3D composite photonic crystal; and

FIG. 14 is a block diagram of a quasi-3D composite photonic crystal having a line defect with a bend.

10

### **DETAILED DESCRIPTION OF THE INVENTION**

The invention involves a new class of dielectric structure, composite or quasi-3D photonic crystals, that improve the attainable quality factors while retaining the relative ease of fabrication and analysis of TIR designs. FIGs. 1A-1C are block diagrams of composite photonic crystals in accordance with the invention, with portions of the crystals cutaway to illustrate the interior structure. Composite or quasi-3D structures are one- or two-dimensionally periodic photonic crystals (i.e., structures with band gaps in one or two dimensions) that are bounded in the remaining dimensions by other one- or two-dimensionally periodic crystals. Quasi-3d crystals can, in addition, make use of total internal reflection to further enhance confinement.

20        A quasi-3D photonic crystal consists of two components, a guide crystal and a barrier crystal (or crystals). The guide crystal is a slab or rod consisting of a two- or one-dimensionally periodic photonic crystal, respectively, and is the layer of material in which light is to be guided or trapped, or in which resonances are to be formed. A barrier crystal is a one- or two-dimensionally periodic photonic crystal that helps to confine light within the guide crystal-ideally, it reflects any light trying to escape from the guide crystal. There can be more than one kind and dimensionality of barrier crystal surrounding the guide crystal. A barrier crystal can also have a lower average dielectric constant than the guide crystal, in which case confinement of light is further enhanced by total internal reflection.

25        FIG. 1A is a block diagram of a composite photonic crystal 100 which includes a two-dimensionally periodic guide crystal 102 bounded by a one-dimensionally periodic barrier crystals 104,106. FIG. 1B is a block diagram of a composite photonic crystal 108



which includes a two-dimensionally periodic guide crystal 110 bounded by two-dimensionally periodic barrier crystals 112,114. FIG. 1C is a block diagram of a composite photonic crystal 116 which includes a one-dimensionally periodic guide crystal 118 bounded by a two-dimensionally periodic barrier crystal 119.

5

FIG. 2 illustrates a block diagram another embodiment of the invention, in which a barrier crystal 202 is used to confine light in some directions of a guide crystal 204, and TIR to confine it in others, producing a hybrid structure 200. Essentially, it is desirable to match the gap frequencies of the various photonic crystals making up the quasi-3D structure. Each gap prevents the propagation of light in a particular direction, and when combined they can form a quasi-gap that imperfectly confines light in all directions. Thus, approximate confinement of light modes in a point defect may be obtained. Additionally, it is possible to achieve perfect confinement of light in a one-dimensionally periodic line defect.

10

Since the guide and barrier crystals consist of only one- or two-dimensionally periodic dielectric variations, they are relatively simple to manufacture compared to true three-dimensionally periodic structures. Furthermore, no special alignment is required between the different crystals, reinforcing the ease of fabrication of such devices.

15

Ideally, it is useful to think of the light in a 2D guide crystal as if it were propagating in the true two-dimensional system, which is easily studied and understood, and for which extensive theoretical results exist. Although the two-dimensional picture fails when it comes to quantitative results, its qualitative predictions still have strong analogues in the quasi-3D system. The two-dimensional model thus provides a simple guide to our intuition in understanding and designing quasi-3d systems.

20

The design of an actual quasi-3D composite photonic crystal structure that is shown to confine light with a high Q factor will now be described. The bulk of the design is done by analyzing each component of the structure independently, which allows for rough tuning of their characteristics using simple systems. Next, they are combined and the resulting structure is shown to have the desired properties. Finally, a large number of parameters result which may be tuned to further enhance the system. Most of the theoretical analysis of the crystal is done in terms of the light modes that can exist within

25

30

the structure with a fixed oscillation frequency (as either standing or propagating waves), referred to as the modes or states of the crystal.

For the guide crystal of the invention, an (infinite) two-dimensionally periodic slab 300 consisting of a square lattice of dielectric rods 302 in air is chosen, as shown in FIG. 3. The cross section of the rods is unimportant; in actual experimental computations, square rods were used. In this example, it will be assumed that the rods are made out of silicon, with a dielectric constant of 11.56 in the frequency range of interest. The corresponding two-dimensional system has a photonic band gap for the TM (transverse magnetic) polarization of light, in which the electric field is parallel to the rods. FIG. 4 is a plot of the 2D band structure of FIG. 3. The other polarization, TE (transverse electric), in which the magnetic field is parallel to the rods, propagates freely at all frequencies.

When the rods are truncated into a slab, light can no longer be divided into pure TE and TM modes. However, there is still a mirror symmetry plane (bisecting the rods) that will serve to segregate the modes according to whether they are even or odd under reflection through this plane. The odd modes are analogous to the TM modes in the 2D system and have a corresponding quasi-gap. It will be appreciated by those skilled in the art any other 2D photonic crystal, or even a 1D waveguide, could have been chosen as a guide crystal as long as it had some sort of band gap.

The barrier crystals will consist of two Bragg mirrors, above and below the rods. Bragg mirrors are one-dimensionally periodic photonic crystals consisting of alternating slabs of two (or more) dielectric materials, and have a band gap that restricts propagation of light perpendicular to the planes. Again, any one-dimensionally periodic photonic crystal, or even a two-dimensional photonic crystal, could have been chosen so long as it prevents propagation of light in some direction away from the guide crystal. The band structure for the barrier crystals by themselves (assuming that they are infinite in extent) forms an envelope that will constrain the modes in the guide crystal.

FIG. 5 is a plot of a band structure for a possible Bragg mirror, folded according to the periodicity of the guide crystal and projected onto the guide's 2D Brillouin zone. That is, the frequency of a mode is plotted according to the component of its wavevector,  $k$ , which is in the plane of the mirrors. The projected  $k$  ranges between points (G, X, M)

on the perimeter of the irreducible Brillouin zone, as shown in the figure. The shaded regions indicate possible light modes in the Bragg crystal. These modes are not confined in any way, and so coupling with the shaded regions must be prevented in order to create guided modes. Thus, it is desirable to work in the unshaded regions in the envelope of  
5 Bragg states; these regions will be referred to hereinafter as "bubbles". If states can be created inside these bubbles, they will be guided (they won't be able to couple with any states in the barrier crystals). Then, from these guided states modes will be created that are localized (albeit imperfectly) in both the guide and the barrier crystal-point defects.

Clearly, there are many possible choices of bubbles to work in-potentially, any of  
10 the bubbles can be used, depending upon the requirements of the system. In this example, attention will be focused on the bottom-most bubble, which corresponds to index confinement. In order to work in this bubble, the average dielectric constant in the barrier crystals must be made lower than that in the guide crystal. To do this, it will be assumed that the Bragg mirrors are made out of layers of silicon dioxide (with a dielectric constant  
15 of 2.1) and some other material with an  $\epsilon$  of 1.0. If the Bragg gap is maximized, this leads to an average dielectric constant of 1.4488 in the barrier crystals, versus an  $\epsilon$  of 2.33 in the guide crystal. Although the bottom bubble is purely an index confinement effect, there are also two bubbles on the sides, due to the band gap in the Bragg crystal, which will be taken advantage of. However, the discussion of these bubbles will be postponed  
20 until the guide crystal has been analyzed.

The guide crystal is based upon the 2D lattice of rods whose band structure is given in FIG. 4. When we the rods are truncated (in air, with no barrier crystals yet), this 2D band structure is essentially sandwiched into the light cone, consisting of modes that can propagate in the empty air. FIGs. 6A and 6B are plots of projected band structures  
25 for square lattice of truncated rods in air for heights of 0.6a and 1.6a, relative to the horizontal lattice constant a. The shaded region is the light cone. The bands under the light cone are guided modes, and are trapped in the plane of the rods because they cannot couple with modes propagating through the air. The TE and TM polarizations in 2D now become odd and even guided modes (with respect to the plane of symmetry). Just as there  
30 was a gap for TM modes in 2D, there is a gap for odd guided modes in this structure. By adjusting the rod height to between one and two times the horizontal lattice constant, it

is possible to make this gap quite large. Similar results would be obtained for other possible guide crystals, but the dimensions would differ.

It is important to note that the "gap" in this system is only for the guided modes, and there are extended (light cone) modes with frequencies in the gap. Because of this, if a localized defect state is created in the gap, it will couple to modes in the light cone and slowly leak away into the air. FIG. 7 is a graph of an abstract band structure for a defect state in the guide crystal, indicating the states in the light cone that it can couple to, causing it to "leak out". It is impossible to completely eliminate this leakage without resorting to a true 3D photonic crystal. The goal is rather to minimize the coupling to these extended states and thus minimize the rate of leakage. In fact, because a defect state (formed by slightly altering the guide crystal in one location) can be made mostly out of guided modes, its coupling to extended states is already relatively weak. This is the principle of index-confinement structures, which allows them to confine light without having any additional photonic crystals.

The system can be improved, however, by using barrier crystals on either side of the guide crystal, rather than air. Essentially, "bubbles" can be positioned in the light cone right where a defect state would otherwise couple with the extended states. This reduces the number of states that a defect can couple to, thereby reducing the leakage and increasing the quality factor,  $Q$ . To do this, the frequencies of the bubbles (band gaps in the barrier crystals) need to be matched with the band gap in the guided modes of the guide crystal. The locations and sizes of the bubbles can be easily tuned by adjusting the dielectric constants, relative lattice constants, and other parameters of the crystals. In the case of the Bragg mirrors, the side bubbles will be moved down by adjusting the lattice constant of the Bragg mirrors relative to that of the guide crystal. When this is done, the resulting band structure is shown in FIG. 8, corresponding to the dielectric structure in shown in FIG. 9.

FIG. 8 is a plot of the band structure of a square lattice of rods sandwiched between two Bragg mirrors, effectively a composite quasi-3D photonic crystal. The shaded regions denote the envelope of extended states in the Bragg mirrors. Also shown are the bands corresponding to modes localized in the guide crystal. The gap in the

guided modes is aligned with the side bubbles caused by the band gap in the Bragg mirrors. This allows for the creation of high Q defect modes in the guide crystal.

FIG. 9 is a block diagram of a composite photonic crystal 900 in accordance with the invention. The photonic crystal 900 includes a square lattice of rods 902 with a lattice constant  $a$ . The rods have a radius of  $0.2a$ , a dielectric constant of  $\epsilon = 11.56$ , and a height of  $1.7a$ . The rods are sandwiched between a pair of Bragg mirrors 904, 906. Each of the Bragg mirrors includes alternating first 908 and second 910 layers. The first layers have a width of  $0.834a$  and a dielectric constant  $\epsilon = 1.0$ . The second layers have a width of  $0.574a$  and a dielectric constant  $\epsilon = 2.1$ .

Now that the quasi-3D composite photonic crystal is configured, creating a defect state is relatively easy. For example, changing the size and/or dielectric constants of one or more of the rods will create a defect state. If the dielectric constant of one of the rods is decreased (or, equivalently, decrease its radius), a defect state arises. FIGs. 10A and 10B are cross sections of a point defect state in a quasi-3D photonic crystal 1000 including a defect rod 1002 in accordance with the invention with the component of the electric field parallel to the rods. FIG. 10A is a side view in a plane intersecting the axis of the defect rod. FIG. 10B is a top view in a plane bisecting the axis of the defect rod. The high spatial locality and its similarity in cross section to the corresponding defect state in the pure two-dimensional system of FIG. 11 will be noted. FIG. 11 is a top view of a point defect state in a true two-dimensional system 1100 (square lattice of rods). The component of the electric field parallel to the rods is shown (TM mode).

It turns out that one can achieve a higher Q (slower rate of leakage) by having a more delocalized state that is only a small perturbation on the original crystal. In this case, this is accomplished by changing the dielectric constants of 5 rods in "plus" pattern from 11.56 to 9. This yields a defect state with a Q of 1882.

Compare this to the system with the Bragg mirrors replaced by a material with the same average dielectric constant. The configuration has the same band structure, except that it doesn't have the two "bubbles" on the sides since there is no Bragg gap. The resulting system depends solely on index confinement to prevent light from escaping perpendicular to the guide crystal. When the same defect is made, it is found that the resulting Q is 1300. Thus, the addition of the Bragg "bubbles" on the side from the

barrier crystals enhances the quality factor by almost 50% in this case. If air had been used on both sides, the greatly increased index contrast would have boosted the  $Q$  to over 2000. However, a crystal formed of rods suspended in air cannot actually be constructed. The rods have to be supported on something.

5        Another possibility is to have a Bragg mirror on one side of the guide crystal, but only air on the other side. Here, only index confinement is used on the side with the air, although the index contrast is higher than the index contrast with the Bragg mirrors. In this case, again for the same defect, a  $Q$  of 1637 is obtained. The result is worse than both the case with two Bragg mirrors and the case with air on both sides. The reason  
10        being that the configuration involves having broken the symmetry of the system. Not only can the defect mode couple to what was formerly an inaccessible even mode, but also the former odd mode is no longer guided for all  $k$ -points in the Brillouin zone. This results in a defect state that is made up of states that were extended even in the unperturbed system. In short, it is better to have a symmetric structure.

15        At this point, the parameters of the system have not been tweaked in order to optimize the structure. There are many things that can be done. Simply by making the rods a little longer, it turns out that one can push the  $Q$  up to almost 2200. Other improvements would be to increase the radius of the rods (which will enhance the index contrast), vary the spacing of the Bragg mirrors (or even add extra layers of different  
20        thicknesses or dielectric constants), and further extend the size of the defect. Separating the Bragg mirrors slightly from the guide crystal (with low-index extensions of the rods) would also probably enhance the  $Q$  (by reducing the coupling of the defect state with states in the Bragg mirrors). These are only minor modifications. One could easily completely change the structure, while preserving the essential character of the defect  
25        state, by using a different lattice or a barrier crystal with 2D periodicity, for example.

      Although the capability to trap light in a point defect is critical for most applications, it is also important to be able to build a one-dimensional waveguide, a line defect. It turns out that such a configuration is possible in a quasi-3D system. The same structure can be configured in TIR structures and (of course) in true 3D crystals. The  
30        fundamental reason is that, for a line defect, the system is still periodic in one direction, and thus there is one wavenumber  $k$  to work with. A point defect has no  $k$  and can

interact with any state in the band structure that has the same frequency as it. A line defect, since it has a  $k$ , cannot interact with states having a different  $k$ . The foregoing restriction permits us to create a state that interacts with nothing else and thus cannot escape.

5        A line defect can be created, for example, by slightly decreasing the dielectric constants of a horizontal line of rods. In this case, the band structure is projected onto the G-X direction, and is shown in FIG. 12. FIG. 12 is a plot of the band structure of a quasi-3D composite photonic crystal projected onto the  $\Gamma$ -X direction, and is the framework in which a line defect can be created. The rod height is slightly different than  
10        in the structure of FIG. 8. From the plot, it is shown that the gap in the guided mode remains, and in this gap the line defect creates a band of localized states.

      These states are localized in only the two directions perpendicular to the waveguide, and consist of modes that propagate along the defect. FIGs. 13A and 13B are side view and top view cross sections, respectively, of a line defect state in a quasi-3D  
15        composite photonic crystal 1300. The defect state is shown in a  $5 \times 1$  cell, and it is extended in the direction shown.

      Although light may be perfectly confined in a line defect, even in the quasi-3D structure, this is no longer true as soon as a bend is introduced, as in the structure shown in FIG. 14. FIG. 14 is a block diagram of a quasi-3D composite photonic crystal 1400,  
20        similar to the structure of FIG. 9, having a line defect 1402 with a bend positioned in a square lattice of rods 1404, and barrier crystals 1406. The defect rods can have, for example, a different dielectric constant as in FIG. 13, or a different radius. At a bend, light can escape, and the degree of confinement is related to the Q of point defects in the same structure. Since quasi-3d composite photonic crystals permit high-Q point defects,  
25        it will be possible to maintain good confinement in waveguides with sharp bends.

      Although the present invention has been shown and described with respect to several preferred embodiments thereof, various changes, omissions and additions to the form and detail thereof, may be made therein, without departing from the spirit and scope of the invention.

30        What is claimed is:

**CLAIMS**

- 1 1. A composite photonic crystal structure comprising:  
2 a guide crystal configured in a plane having a dielectric periodicity in at least a  
3 first direction in said plane; and  
4 barrier crystals configured above and below said guide crystal to confine light  
5 within said guide crystal, said barrier crystals having a dielectric periodicity in at least a  
6 second direction not in said plane.
- 1 2. The structure of claim 1, wherein said guide crystal comprises a two-dimensionally  
2 periodic photonic crystal.
- 1 3. The structure of claim 2, wherein said barrier crystals comprise a one-  
2 dimensionally periodic photonic crystal.
- 1 4. The structure of claim 2, wherein said barrier crystals comprise a two-  
2 dimensionally periodic photonic crystal.
- 1 5. The structure of claim 1, wherein said guide crystal comprises a one-dimensionally  
2 periodic photonic crystal.
- 1 6. The structure of claim 5, wherein said barrier crystals comprise a two-  
2 dimensionally periodic photonic crystal.
- 1 7. The structure of claim 1, wherein the combination of said guide crystal and said  
2 barrier crystals exhibits a partial three-dimensional photonic band gap.
- 1 8. The structure of claim 1, wherein said barrier crystals comprise a dielectric  
2 periodicity in at least a second direction orthogonal to said plane.
- 1 9. A composite photonic crystal structure comprising:  
2 a guide crystal configured in a plane having a dielectric periodicity in at least  
3 one dimension; and



4           a barrier crystal configured adjacent said guide crystal to confine light within said  
5 guide crystal, said barrier crystal having a dielectric periodicity in at least two dimensions.

1   10.    The structure of claim 8, wherein said guide crystal and said barrier crystal have  
2   respective photonic band gaps that are aligned to define a partial three-dimensional  
3   photonic band gap.

1   11.    The structure of claim 9, wherein said guide crystal comprises a two-dimensionally  
2   periodic photonic crystal.

1   12.    The structure of claim 9, wherein said barrier crystals comprise a two-  
2   dimensionally periodic photonic crystal.

1   13.    The structure of claim 9, wherein said guide crystal comprises a one-dimensionally  
2   periodic photonic crystal.

1   14.    The structure of claim 9, wherein said barrier crystals comprise a dielectric  
2   periodicity in at least a second direction orthogonal to said plane.

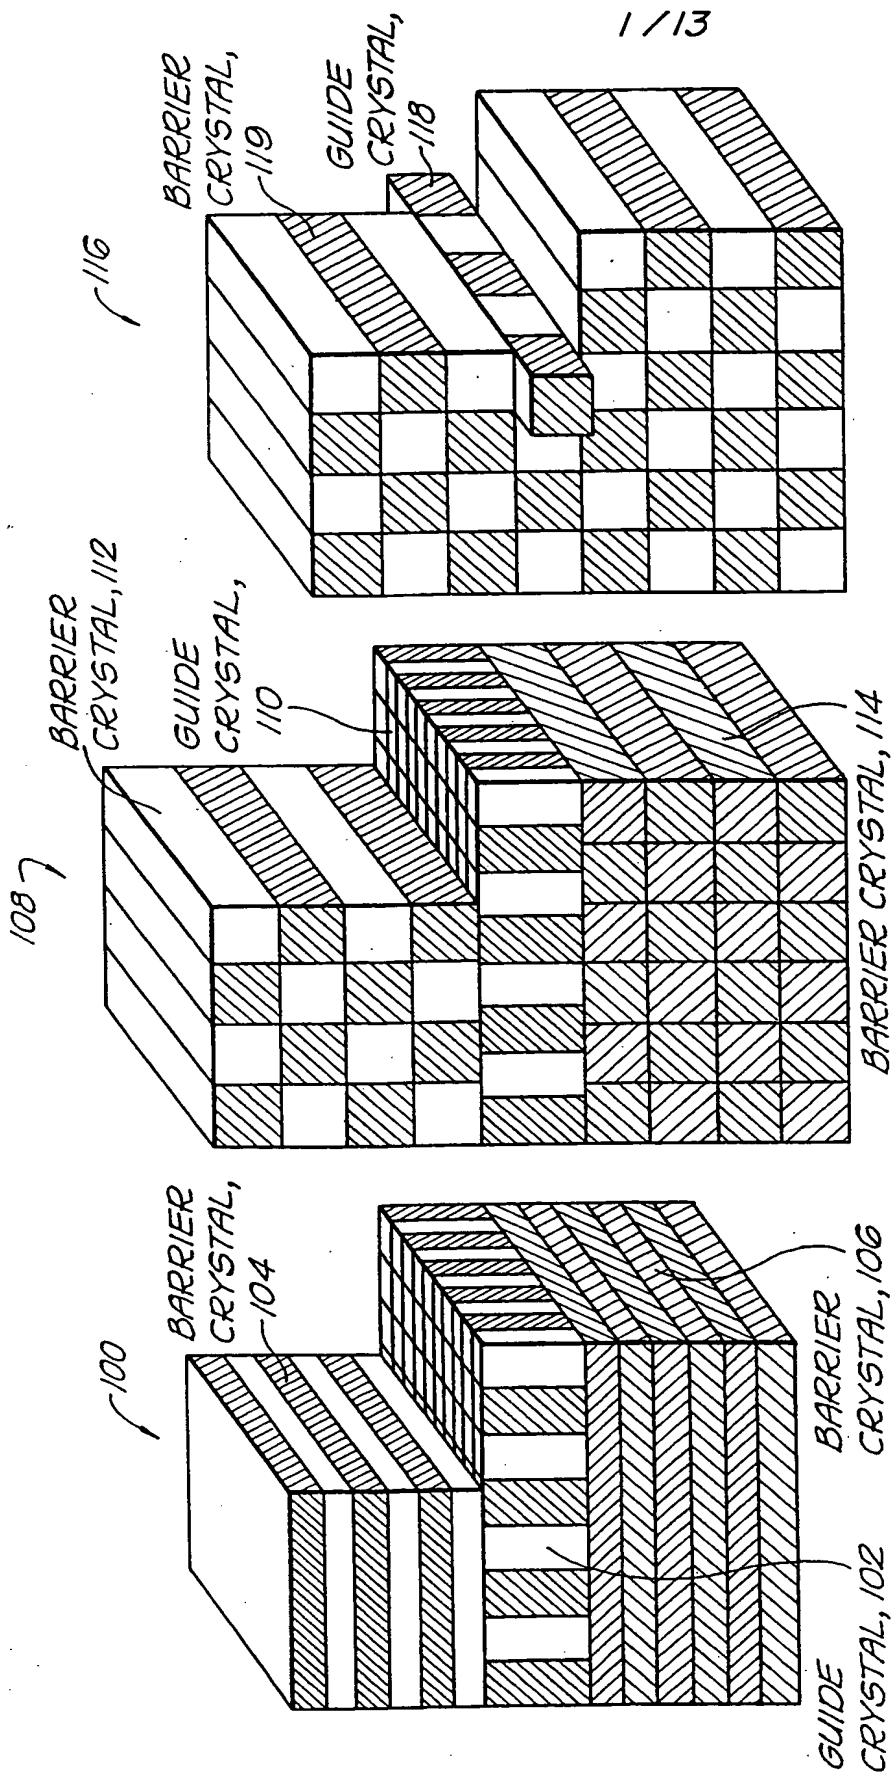
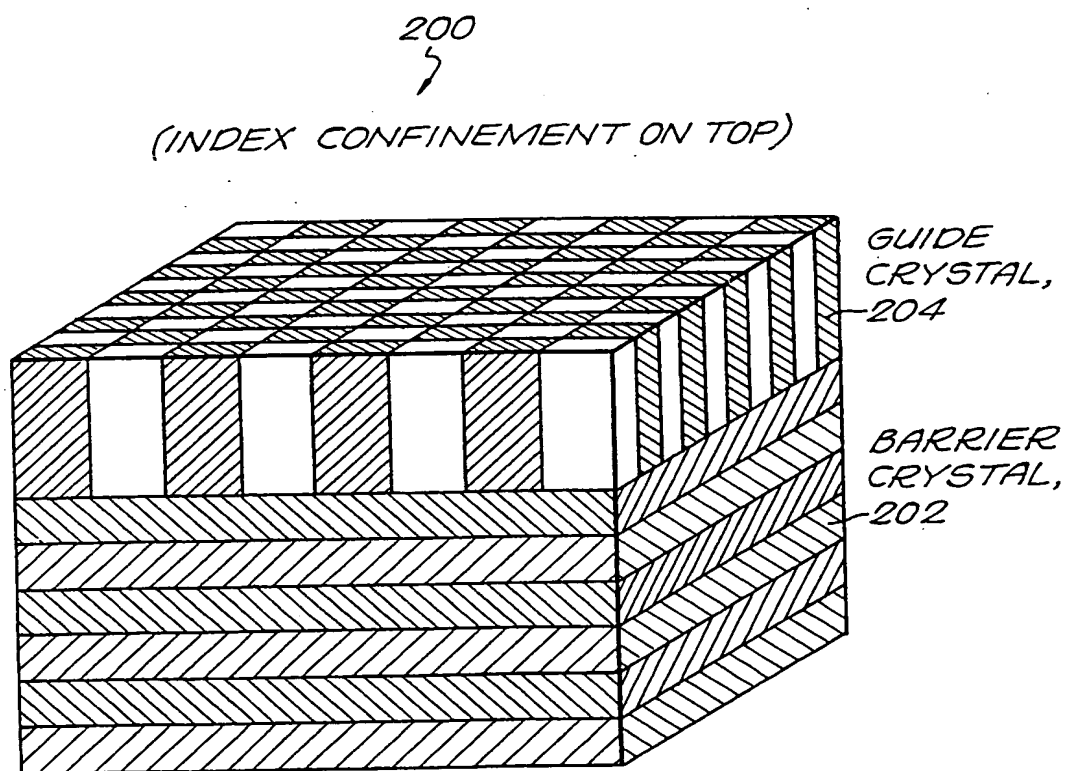


FIG. 1C

FIG. 1B

FIG. 1A

2 / 13



**FIG. 2**

3/13

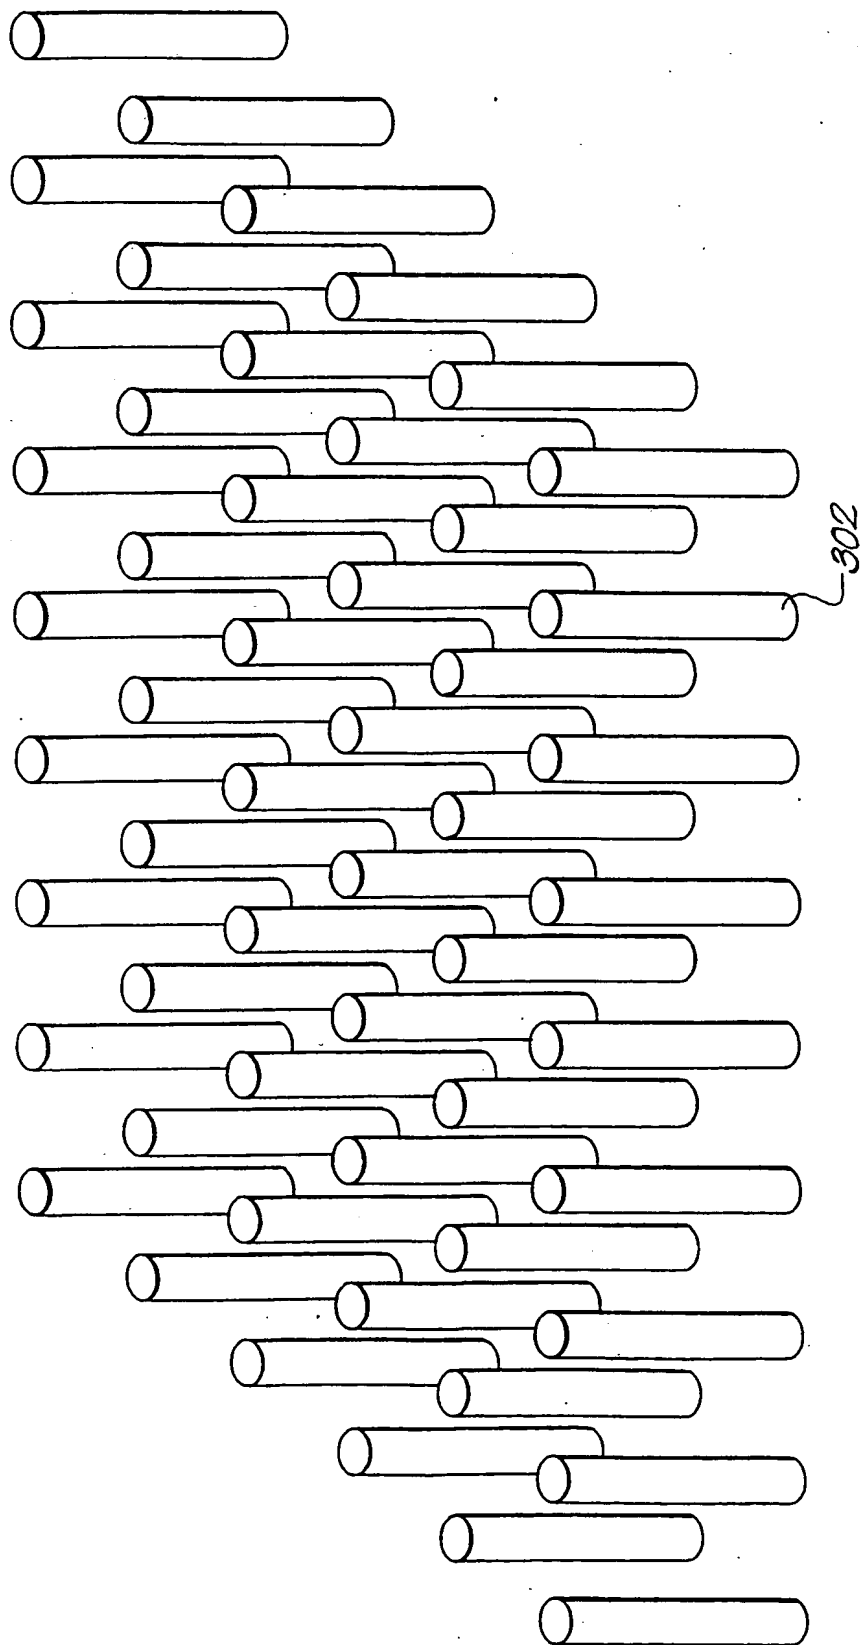


FIG. 3

4 / 13





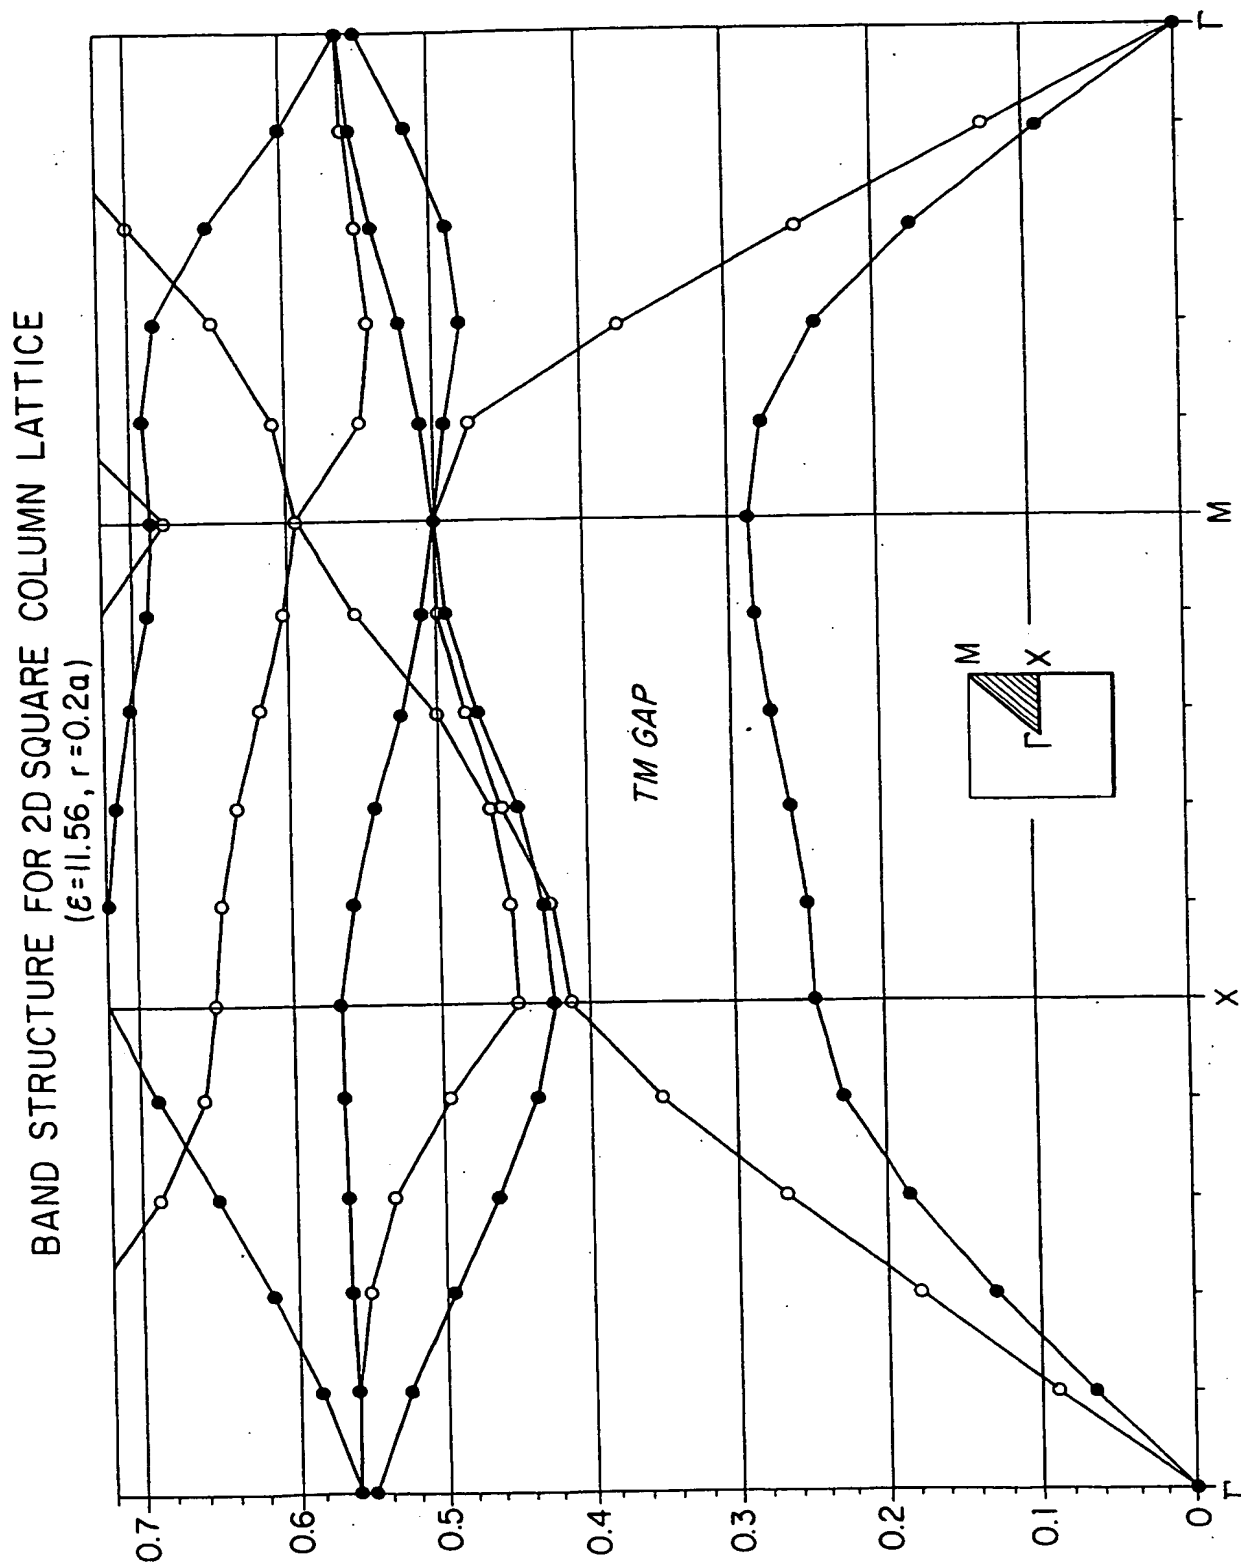


FIG. 4

SUBSTITUTE SHEET (RULE 26)



5 / 13

PROJECTED BAND STRUCTURE FOR BRAGG MIRRORS  
( $\epsilon=11.56$ , AIR THICKNESS=0.7143, HORIZONTAL  $a=0.8$ )*FIG. 5*RODS IN AIR, HEIGHT=0.6a  
( $\epsilon=11.56$ , RADIUS=0.2a)*FIG. 6A*

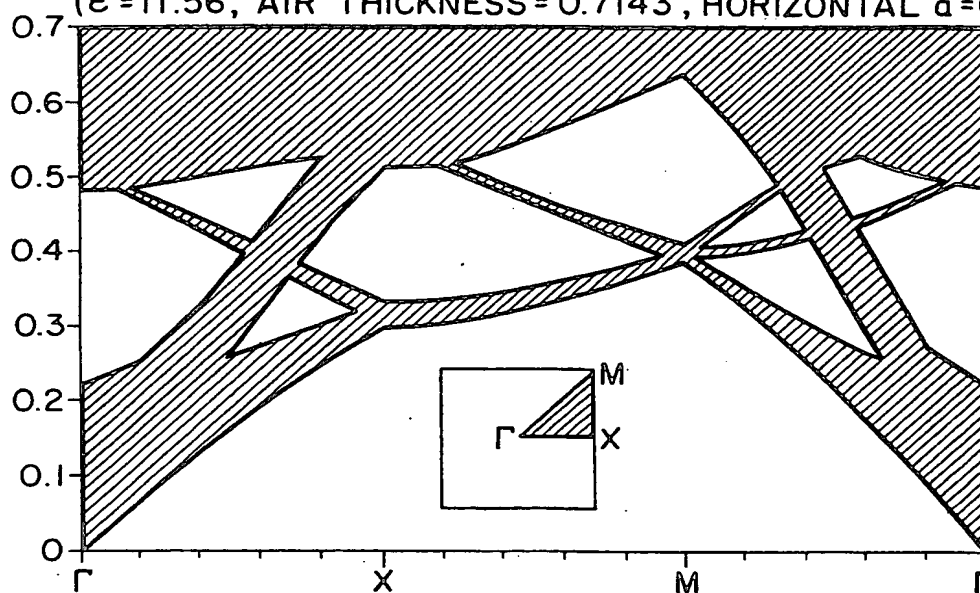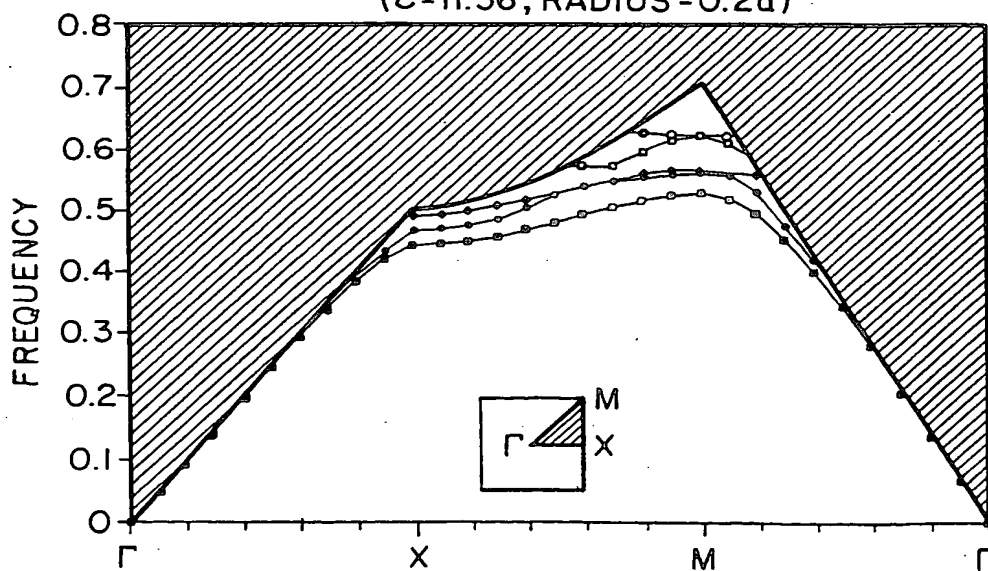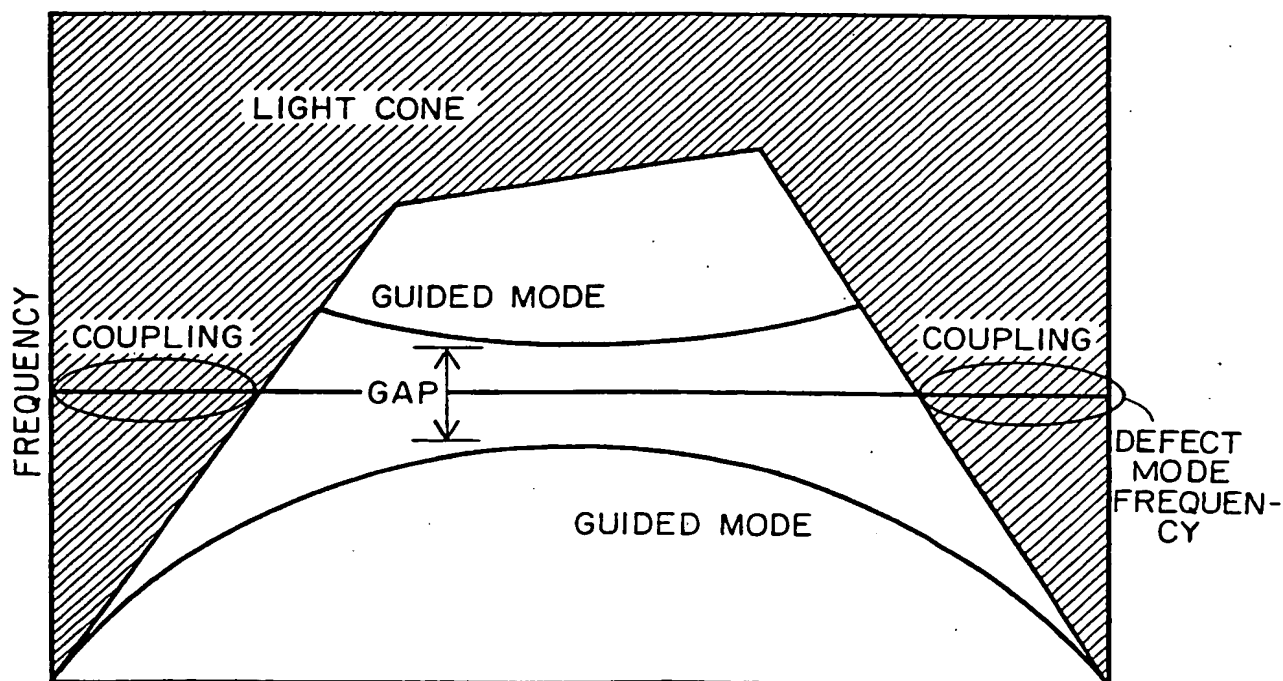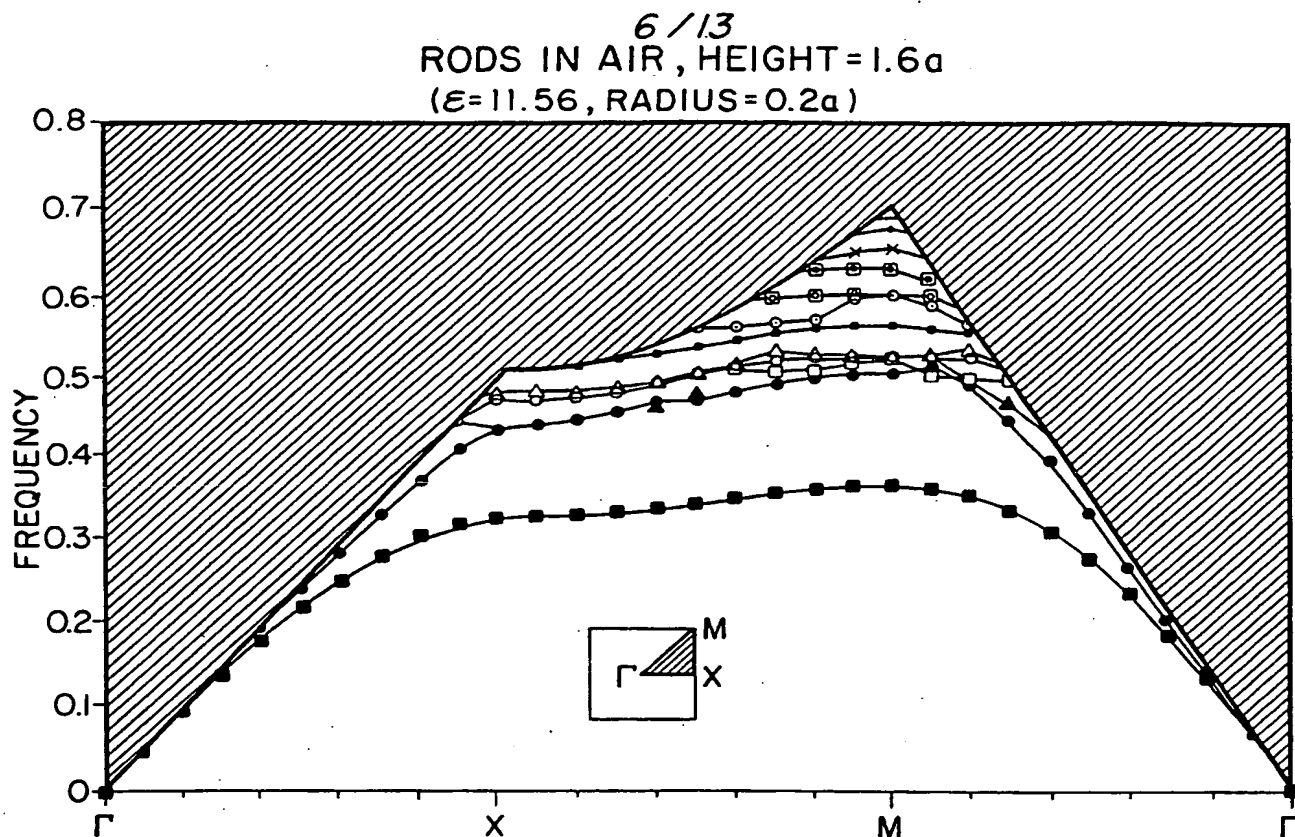


7/13

FABRY SANDWICH (ROD  $h=1.7$ ,  $r=0.2$ ,  $a=1.0$ )  
 (BRAGG MIRRORS:  $\epsilon=2.1$  THICKNESS=0.492885, LATTICE CONSTANT=1.20714)

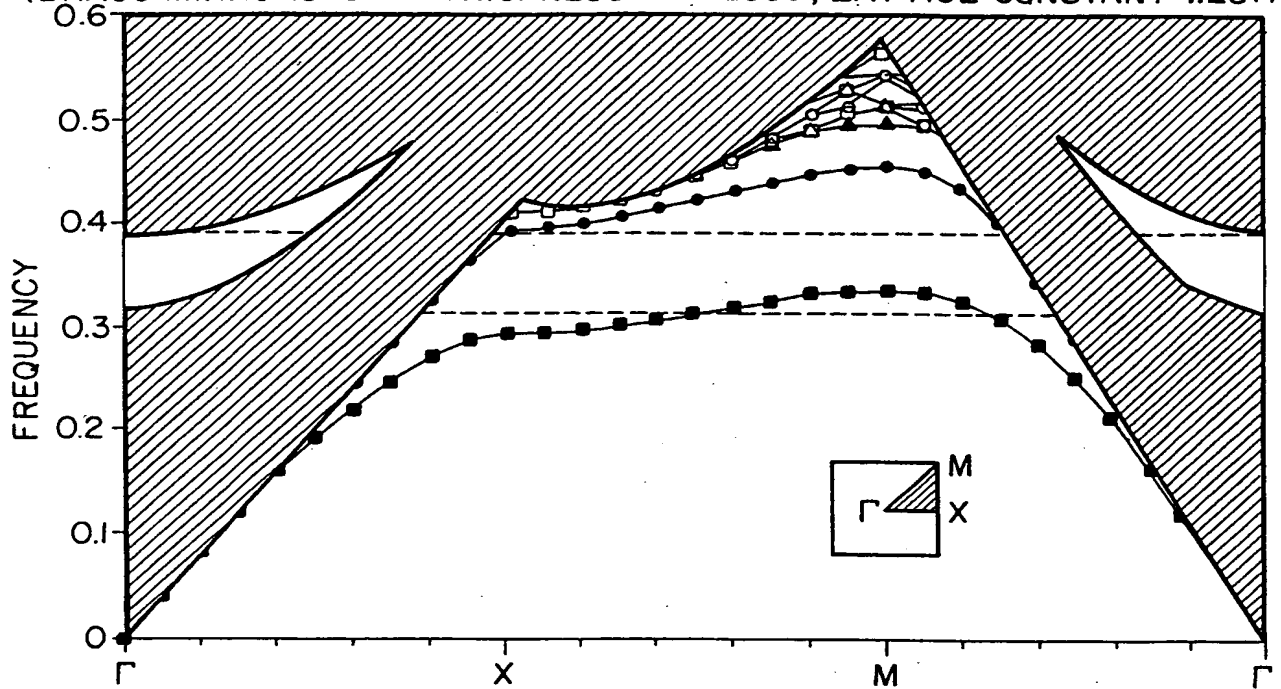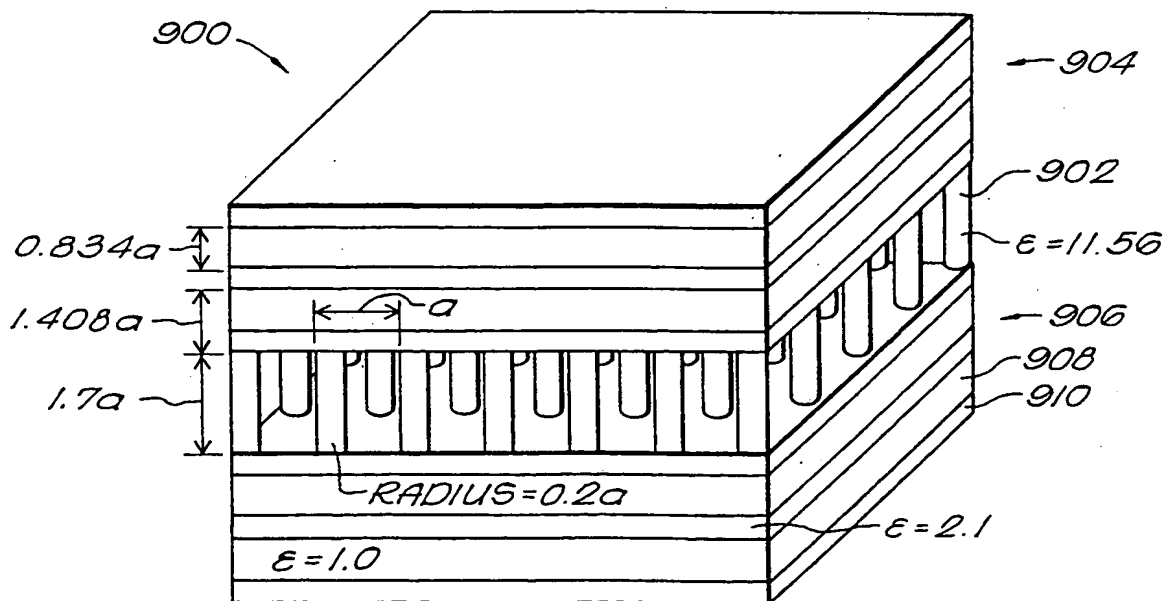
**FIG. 8****FIG. 9**




8/13

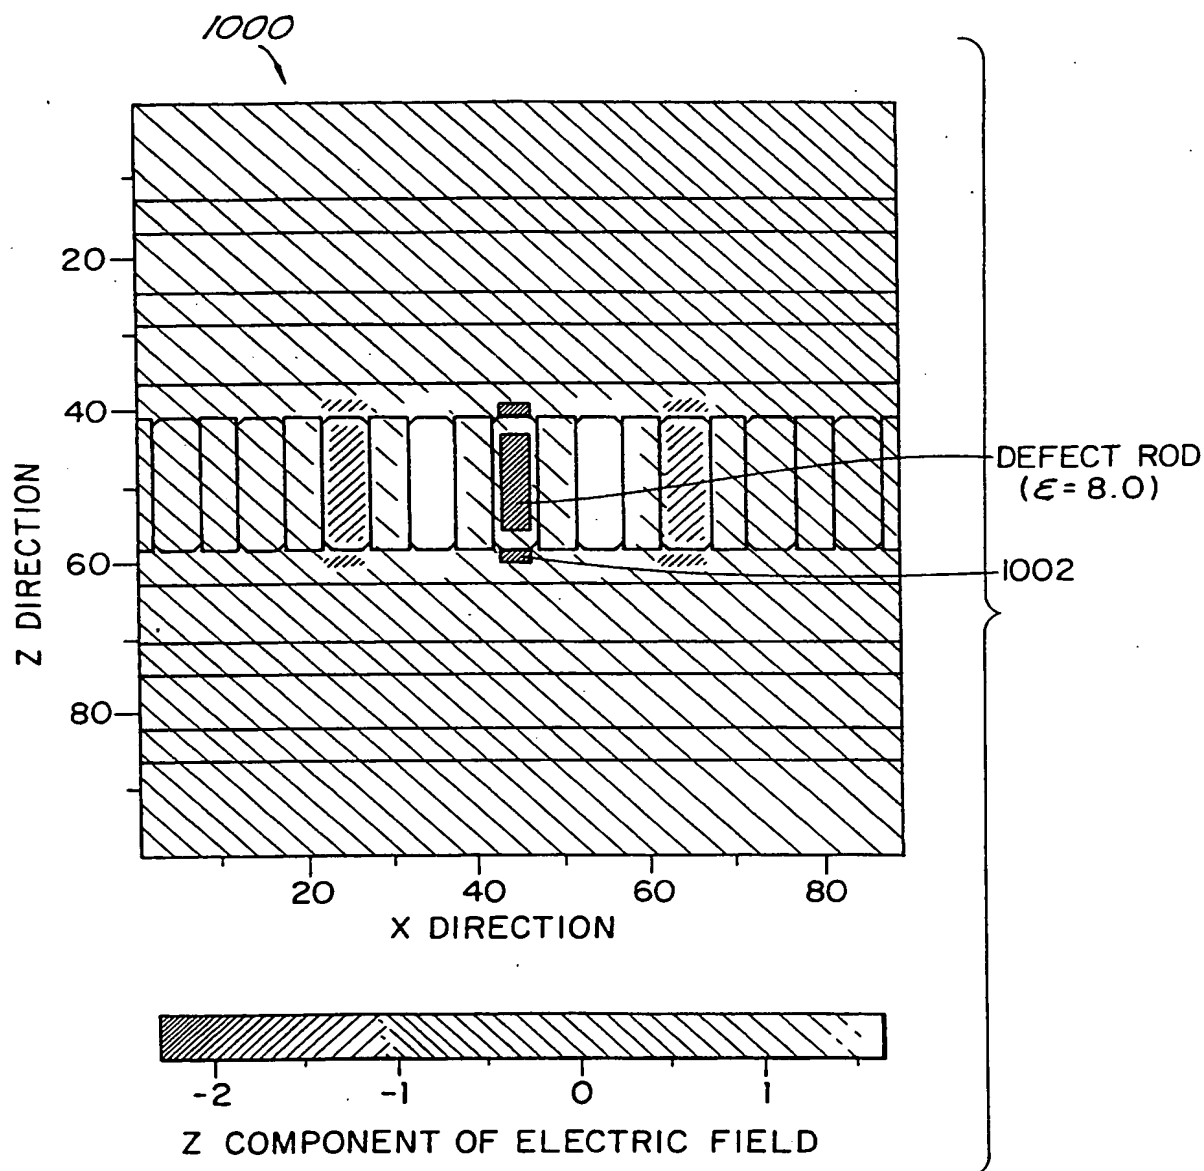**FIG. 10A**

9/13

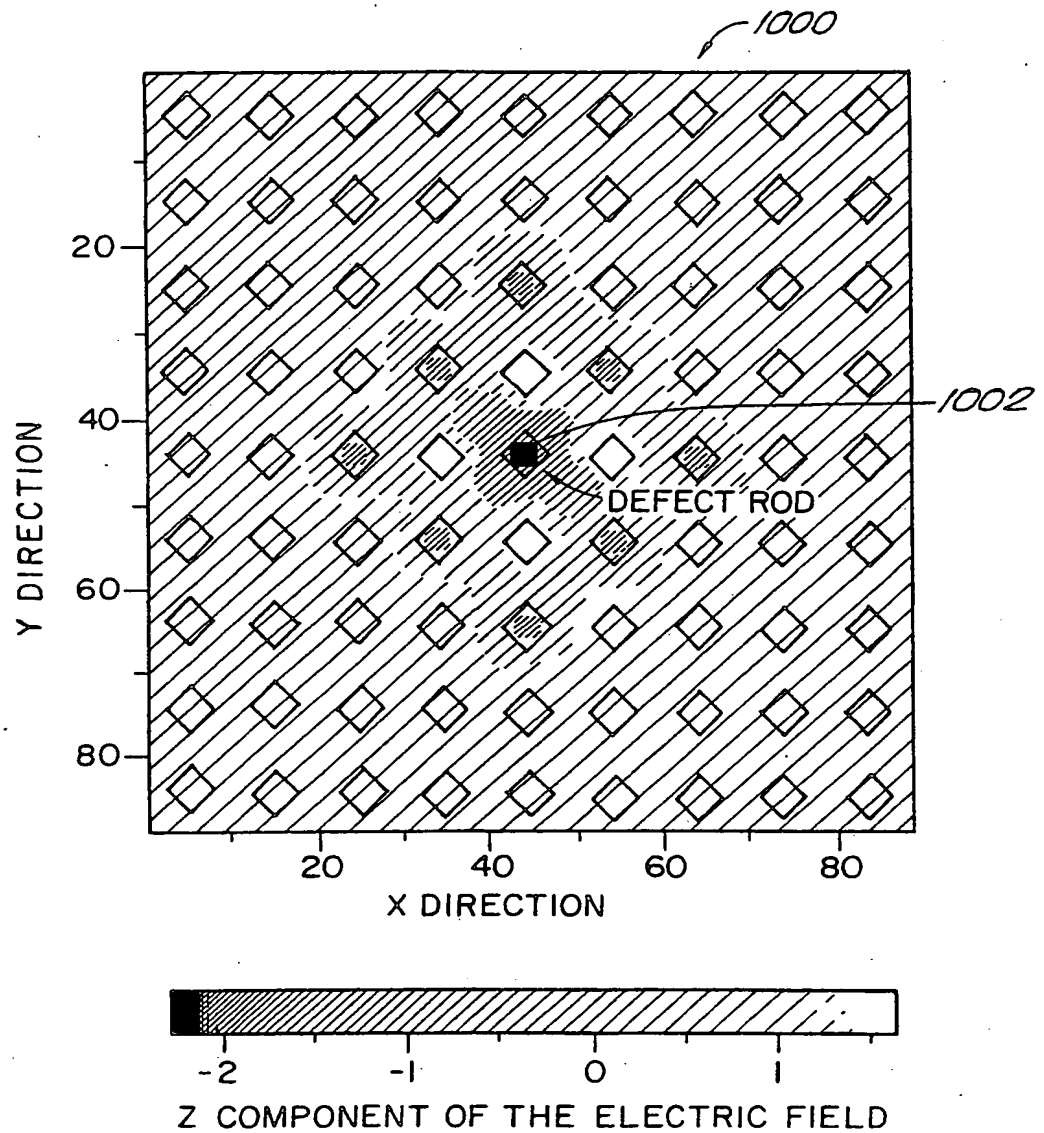**FIG. 10B**

10/13

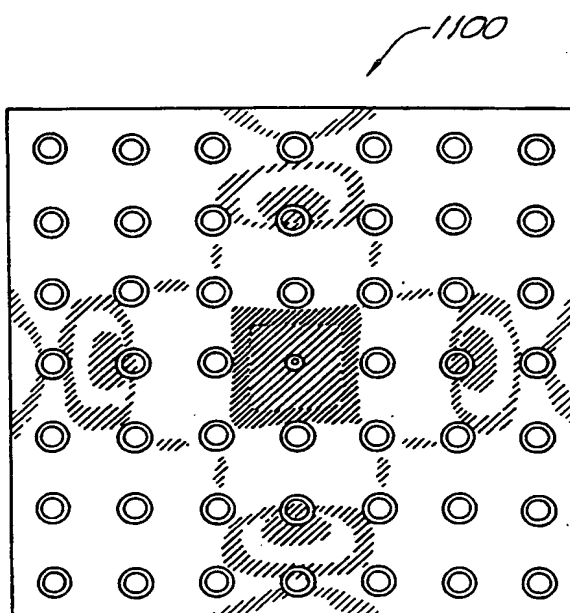*FIG. 11*

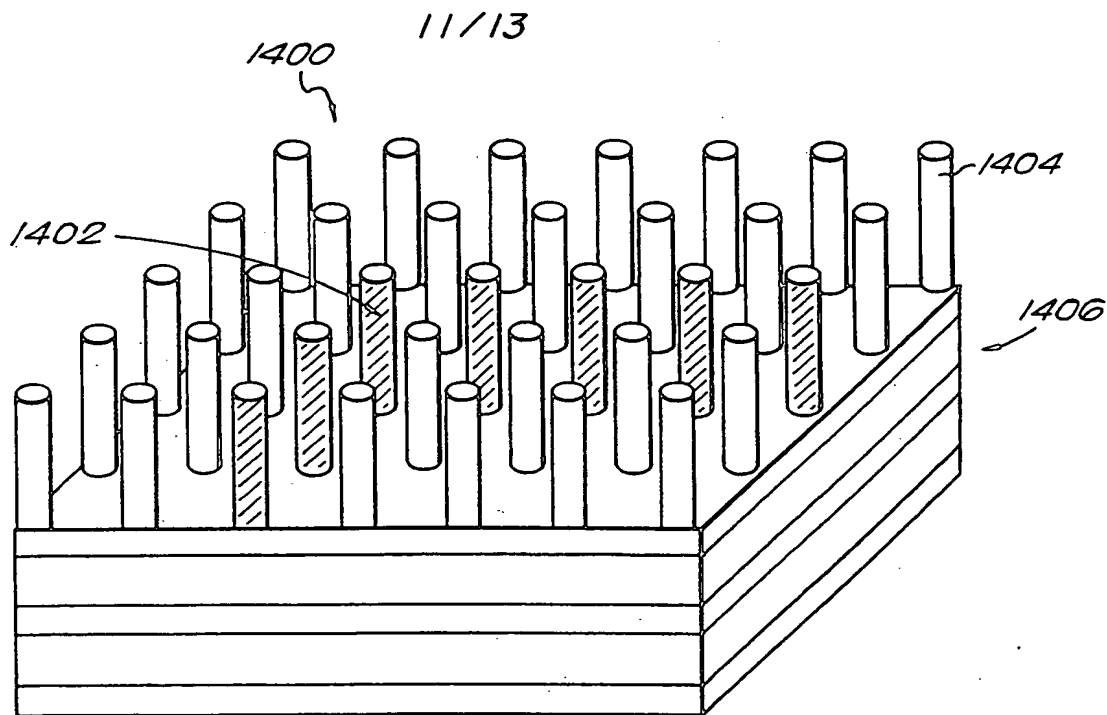


FIG. 14

$\Gamma$ -X PROJECTED FABRY SANDWICH (ROD  $h=1.9$ ,  $r=0.2$ ,  $a=1.0$ )  
(BRAGG MIRRORS:  $\epsilon=2.1$  THICKNESS=0.492885, LATTICE CONSTANT=1.20714)

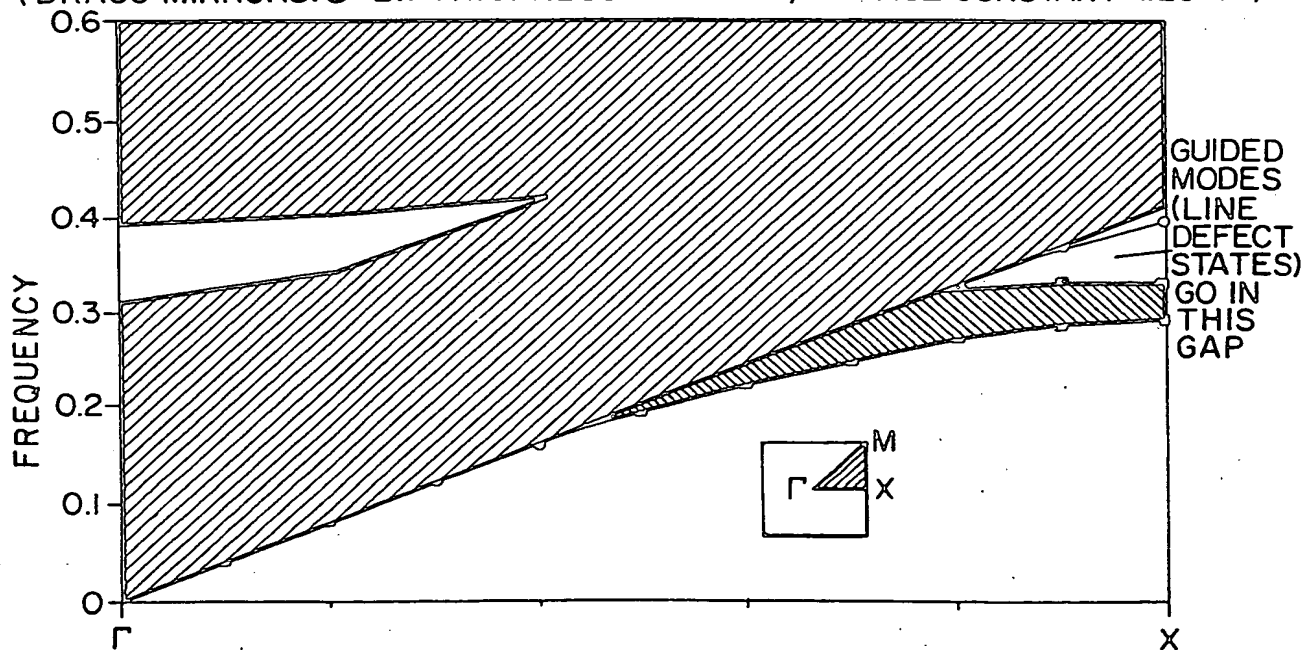
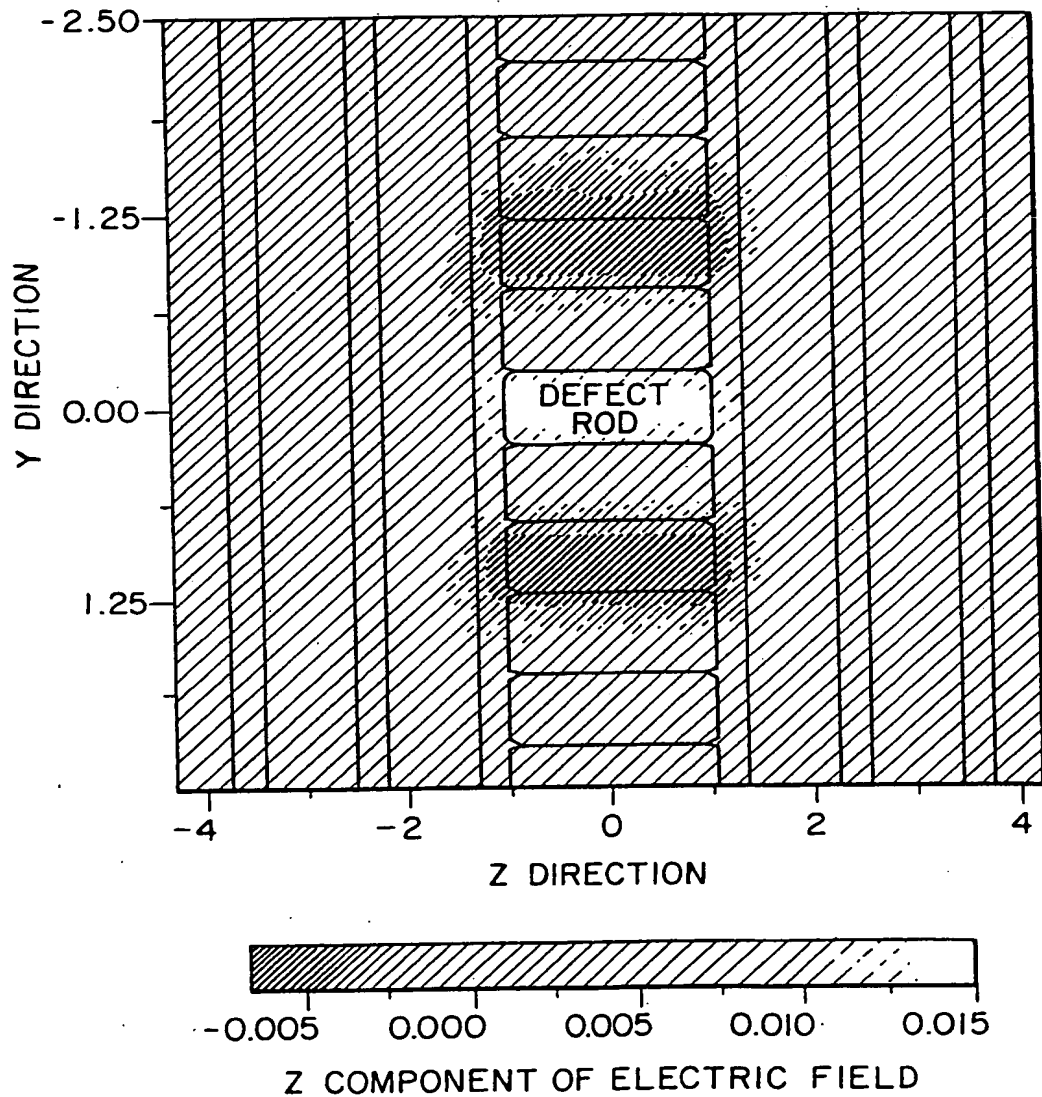



FIG. 12

12/13

*FIG. 13A*

SUBSTITUTE SHEET (RULE 26)

13/13

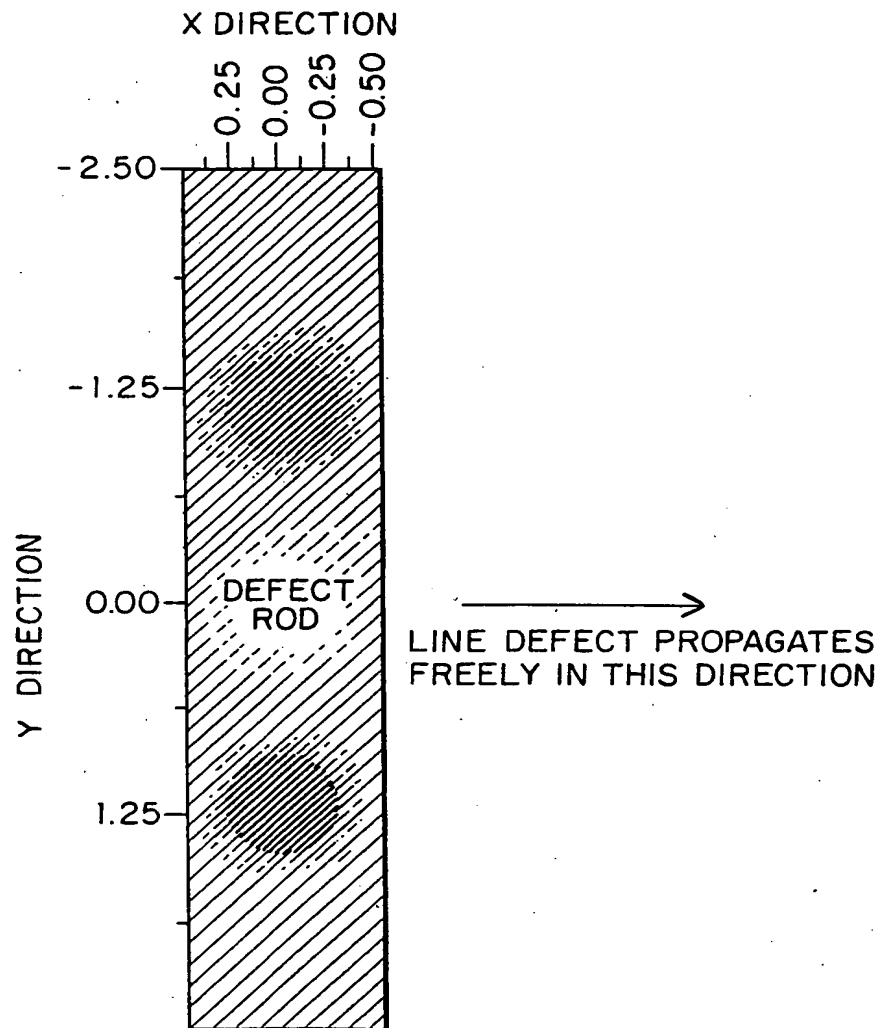*FIG. 13B*

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 99/18181

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G02B6/12

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 98 44368 A (SAKAKI HIROYUKI ; SHIRAISHI KAZUO (JP); KAWAKAMI SHOJIRO (JP)) 8 October 1998 (1998-10-08) abstract; figures 25, 34, 35	1, 2, 4-14
X	US 5 688 318 A (MILSTEIN JOSEPH B ET AL) 18 November 1997 (1997-11-18) column 10, line 4 -column 11, line 11; figure 4	1, 9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

31 January 2000

Date of mailing of the international search report

08/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ciarrocca, M

# INTERNATIONAL SEARCH REPORT

Inte. onal Application No

PCT/US 99/18181

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WENDT J R ET AL: "NANOFABRICATION OF PHOTONIC LATTICE STRUCTURES IN GAAS/ALGAAS" JOURNAL OF VACUUM SCIENCE AND TECHNOLOGY: PART B,US,AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 11, no. 6, 1 November 1993 (1993-11-01), page 2637-2640 XP000423420 ISSN: 0734-211X the whole document	1,5-10, 12-14
P,X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 01, 29 January 1999 (1999-01-29) & JP 10 284806 A (CANON INC), 23 October 1998 (1998-10-23) abstract	1-3,8
X	HIRAYAMA H ET AL: "NOVEL SURFACE EMITTING LASER DIODE USING PHOTONIC BAND-GAP CRYSTAL CAVITY" APPLIED PHYSICS LETTERS,US,AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 69, no. 6, 5 August 1996 (1996-08-05), page 791-793 XP000626091 ISSN: 0003-6951 the whole document	1,2, 8-11,14
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 643 (E-1640), 7 December 1994 (1994-12-07) & JP 06 252504 A (NEC CORP), 9 September 1994 (1994-09-09) abstract	1,8,9
X	EP 0 473 983 A (CANON KK) 11 March 1992 (1992-03-11) page 4, line 30 -page 5, line 10; figure 4	1,7-10, 14
X	US 5 526 449 A (MEADE ROBERT ET AL) 11 June 1996 (1996-06-11) cited in the application column 9, line 38 - last line; figure 9	9,11,14
A	WO 98 25314 A (MASSACHUSETTS INST TECHNOLOGY ;TRUSTEES OF BOSTON UNIVERSITY (US)) 11 June 1998 (1998-06-11) page 13, line 35 -page 14, line 25; figure 6	1-3,7,10
	---	
	-/--	



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/18181

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>FORESI J S ET AL: "PHOTONIC-BANDGAP MICROCAVITIES IN OPTICAL WAVEGUIDES" NATURE,GB,MACMILLAN JOURNALS LTD. LONDON, vol. 390, 13 November 1997 (1997-11-13), page 143-145 XP000775843  ISSN: 0028-0836  cited in the application  the whole document</p> <p style="text-align: center;">----</p>	1,5,9,13
A	<p>MEADE R D ET AL: "NOVEL APPLICATIONS OF PHOTONIC BAND GAP MATERIALS: LOW-LOSS BENDS AND HIGH Q CAVITIES" JOURNAL OF APPLIED PHYSICS,US,AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 75, no. 9, 1 May 1994 (1994-05-01), page 4753-4755 XP000543576  ISSN: 0021-8979  the whole document</p> <p style="text-align: center;">-----</p>	1,3,4, 6-10,12, 14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/18181

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9844368 A	08-10-1998	JP 10335758 A	18-12-1998
US 5688318 A	18-11-1997	US 5651818 A	29-07-1997
		US 5385114 A	31-01-1997
JP 10284806 A	23-10-1998	NONE	
JP 06252504 A	09-09-1994	JP 2041574 C	09-04-1996
		JP 7070792 B	31-07-1995
EP 0473983 A	11-03-1992	JP 2927908 B	28-07-1999
		JP 4096389 A	27-03-1992
		DE 69123902 D	13-02-1997
		DE 69123902 T	26-06-1997
		US 5289018 A	22-02-1994
US 5526449 A	11-06-1996	CA 2153485 A	21-07-1994
		EP 0678196 A	25-10-1995
		JP 8505707 T	18-06-1996
		WO 9416345 A	21-07-1994
WO 9825314 A	11-06-1998	US 5955749 A	21-09-1999